


the wing cover sheet must be printed 2x - the bottom wing will be covered from the bottom side

PRINTING: attach the covering paper onto a normal paper using a small amount of 3M spray, set your printer - best quality, decreased ink level. The print scale must be set on 100% (in PDF usually "no scale")

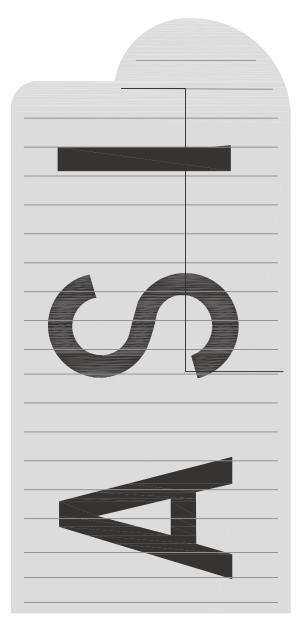

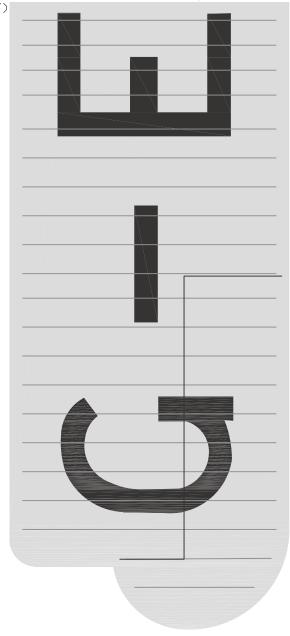

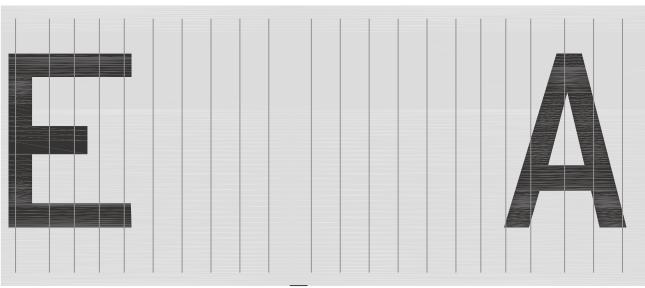

COVERING: coat your covering tissue on a plastic foil (ink print = nitro coat; laser print = acrylic coat). For covering you can use a white glue-stick; cover the middle part of the wing at first



Vickers Vimy Commercial RC-Profile

